

Discover

ETG MCA 100 SYN P

portabile multicomponent gas analyzer for Syngas



O_2 , CO_2 , CO , CH_4 , H_2 , C_nH_m

MONITORING


Suitable for applications:

- Syngas Plants
- Hythane Plants
- Research Center
- Syngas System Integrator

The **ETG MCA 100 SYN** series of gas analyzers by ETG are the ideal solution for Syngas measurement applications because of their accuracy, stability, reliability, broad measurement range, and the variety of available form factors. Unlike other analyzers, ETG MCA 100 SYN P non-dispersive infrared (NDIR) gas analyzers measure multiple gases in the instrument in special wavelength regions, interferences free from the other components. The TCD detector used for H_2 analysis is automatically corrected via proprietary algorithm for possible interferences by other gases. ETG analyzers have the ability to measure CH_4 , CO_2 , CO , C_nH_m , H_2 and O_2 providing the optimal combination of gases for Syngas process optimization. The enhanced optics and electronics of our NDIR analyzers have virtually eliminated zero drift after the initial warm up period. The temperature and pressure compensation eliminates the major causes of span drift in the instruments.



USER INTERFACE OVERVIEW

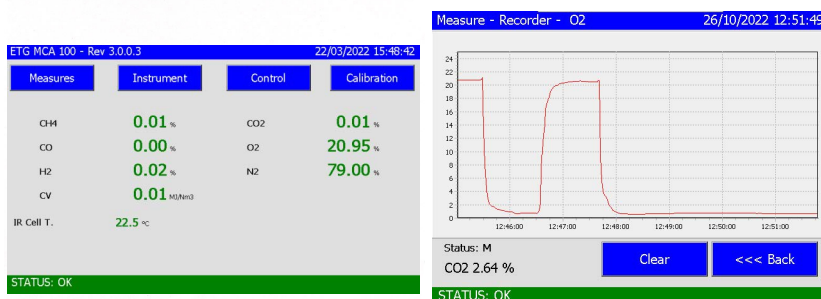

- Cross sensitivity compensation
- Arm processor
- Touch Screen monitor
- Battery pack
- Ethernet, Wi-Fi and USB Remoting
- Low cost of ownership



SPECIFICATIONS

- NDIR (for CO₂ CO and CH₄) & TCD (for H₂) technology
- N₂ and Heat value calculate by proprietary algorithm (standard)
- TCD for H₂
- Sample conditioning system (optional)
- Automatic Autozero free selectable
- Totally developed in Italy

| | |
|---|---|
| Response Time | Response time are specified at a sample flow rate of 1 liter per minute through the MCA 100 sample cell |
| Data Refresh Rate | 1 second |
| Warm-up Time | 30 seconds ready, 3 minutes useable, 30 minutes full performance |
| Operating Temperature | 0° to 70° C (32° to 158° F) |
| Operating Humidity | To 95% RH (Non-condensing) |
| Operating Altitude | -300 to 3.000 m (-1.000 to 10.000 ft) |
| Communications | USB port (standard) |
| Case protections | IP65 |
| Monitor | Touch Screen 5.7" Resistive Type |
| Calibration | Zero & Span user selectable |
| External Electrical Supply | from 100 to 240 Vac 47-63 Hz |
| Pneumatic Connection | Rapid fittings 6.0 OD 4.0 ID |
| Mechanical Dimensions & Weight | 50 x 28 x 40 cm - 7.5 Kg |

TECHNICAL DATA

| Measurement Method | Gas | Resolution | Range | Accuracy | Precision | Time |
|--------------------------------|-----------------|------------|-----------------------------------|------------|--------------|---|
| NDIR (Non-Dispersive Infrared) | Methane | 0,01% | 0-100% | +/-1% F.S. | +/-0,8% | T ₉₀ & T ₁₀ <10 seconds |
| NDIR (Non-Dispersive Infrared) | Carbon Dioxide | 0,01% | 0-40%* | +/-1% F.S. | +/-0,7% F.S. | T ₉₀ & T ₁₀ <10 seconds |
| | Carbon Monoxide | 0,01% | | | +/-1% F.S. | |
| Electrochemical sensor | Oxygen | 0,1% | 0-25.00% | +/-2% F.S. | +/-2% F.S. | <40 seconds from ambient to 0.15 O ₂ |
| Thermoconductibility | Hydrogen | 0,1% | 0-10% 0-20% 0-50% 0-100% | +/-2% F.S. | +/-2% F.S. | T ₉₀ & T ₁₀ <20 seconds |
| NDIR (Non-Dispersive Infrared) | Hydrocarbon | 0,01% | 0- 5% 0-10% 0-20% | +/-1% F.S. | +/-1% F.S. | T ₉₀ & T ₁₀ <10 seconds |

*other ranges on request